

OWNER'S TECHNICAL MANUAL

52039

Automatic Diesel Fuel Nozzle

Description

The 52039 automatic fuel nozzle automatically cuts off when a diesel fuel tank is full.

Operating with flow rates of up to 280 L/min, the 52039 is suitable for applications involving a pump only.

Ideal for high flow truck and bus refuelling and also for oil delivery services.

Materials:		
Body:	Cast aluminium	
Seals:	Buna-N, Viton	
Main stem:	Stainless steel	
Spout:	Aluminium	
Packaging:		
Weight:	3.25kg each	
Net Weight:	13kg / case of 4	
Gross Weight:	16kg / case of 4	
Dimensions: case of 4	44.2 x 33.5 x 40.7cm ³	

Features

- · Aluminium Body Light weight and easy to operate
- · Two-position hold-open device
- One-hand control of hold-open mechanism means easy setting of flow rate
- · Easily replaced spout simply remove the spout retainer nut
- Dual poppets make nozzle easy to open against high inlet pressure
- Right angle design provides large lever area for better grip and easier control, permitting the nozzle to fit into awkward spaces close to walls and into corners
- · 100% Factory Tested



 Using foreign objects to hold open automatic nozzles could result in failure to shut off or personal injury














QLD/PNG TEL: (07) 3204 9166 FAX: (07) 3204 1224 VIC/TAS TEL: (03) 8787 8288 FAX: (03) 8787 8266

TEL: (08) 9302 4199 FAX: (08) 9303 2095 SA/NT TEL: (08) 8241 7111 FAX: (08) 8241 7011 NZ TEL: (09) 447 1007 FAX: (09) 447 1008




Replacement Parts:

KEY	Description	
1	Spout Assembly	
2	Diaphragm Assembly	
3	Main Valve Assembly	
4	Lever	
5	Body	



Product #	Inlet size	Outlet diameter
52039	NPT 1-1/2" / BSP 1-1/2"	38mm

NSW/ACT

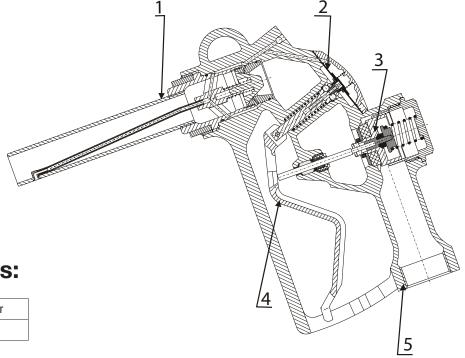

FAX: (08) 8241 7011

QLD/PNG VIC/TAS SA/NT TEL: (07) 3204 9166 FAX: (07) 3204 1224 TEL: (02) 9677 1555 FAX: (02) 9675 1155 TEL: (03) 8787 8288 FAX: (03) 8787 8266 TEL: (08) 9302 4199 FAX: (08) 9303 2095 TEL: (09) 447 1007 FAX: (09) 447 1008 TEL: (08) 8241 7111