



14 Series

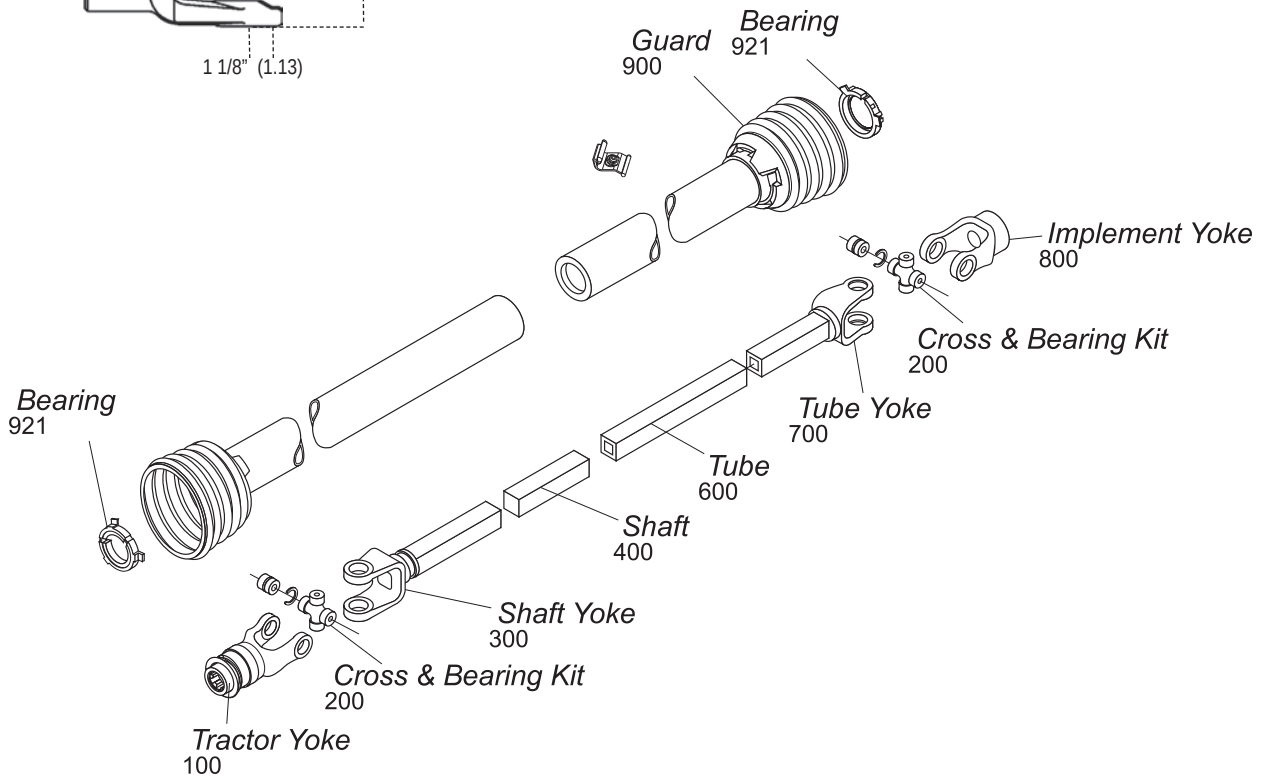


Tractor Yoke

Spring-Lok
Repair Kit — 13003100

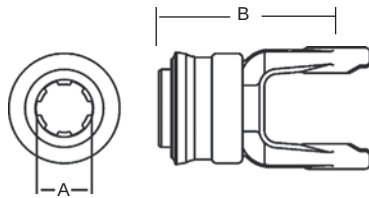


Stock Number	Dim. "A" Bore	Dim. "B"
100-1406	1 3/8" x 6 Spl.	4 5/16"
100-1421	1 3/8" x 21 Spl.	4 5/16"

Quick Disconnect
Repair Kit —
*13002006
**13002021

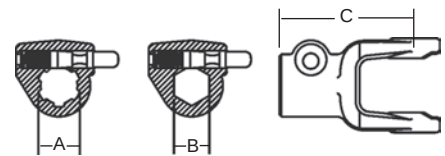


Stock Number	Dim. "A" Bore	Dim. "B" Bore	Dim. "C"
102-1406*	1 3/8" x 6 Spl.		4 5/16"
102-1418**		1 1/8" Hex	4 5/16"
102-1421**	1 3/8" x 21 Spl.		4 5/16"

Safety Slide Lock
Repair Kit — 13004020

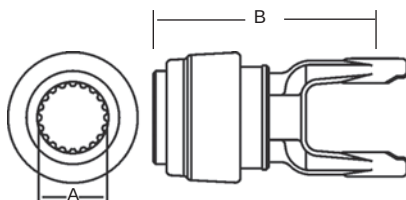

Stock Number	Dim. "A" Bore	Dim. "B"
101-1420	1 3/4" x 20 Spl.	5 5/8"

Ball Shear Device
With Spring-Lok
Repair Kit — 13003100

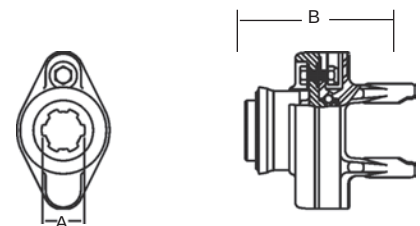

Stock Number	Dim. "A" Bore	Dim. "B"	Shear Bolt
104-1406	1 3/8" x 6 Spl.	4 5/8"	5/16" - 18 Gr. 5
104-1421	1 3/8" x 21 Spl.	4 5/8"	5/16" - 18 Gr. 5

Replacement Shear Bolt Part # 11-10128


14 Series (cont'd.)

Cross & Bearing Kit

(R Kit)

(Recommended 8 hour grease interval)

Snap Ring Located in Yoke




Stock Number	Dim. A	Dim. B
200-1400	1 1/8"	2 5/8"

Extended Lubrication Cross & Bearing Kit

(E Kit)

(Recommended 50 hour grease interval)


Snap Ring Located in Yoke



Stock Number	Dim. "A"	Dim. "B"
201-1400	1 1/8"	2 5/8"

Shaft Weld Yoke

With Bearing Groove
(Guard must rotate freely on yoke)

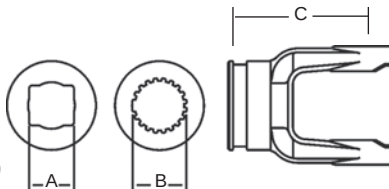

Stock Number	Dim. "A" Bore	Dim. "B" Bore	Dim. "C"
300-1400	1" x 1 1/8"		3 3/8"
301-1400		1 5/16" x 20 Spl.	3 3/8"

Shaft

1" x 1 1/8" Rectangular



Stock Number	Length
400-1618	6'
404-1618	3'


1 5/16" x 20 Spline
Induction Hardened



Stock Number	Length	Major Dim.
404-2120	3'	1.380/1.375

Slip Sleeve

1" x 1 1/8" Rectangular
With Grease Groove



Stock Number	Length	Fits Tube Size
500-1400	5"	2" (.083 Wall)

1 5/16" x 20 Spline
With Grease Reservoir



Stock Number	Length	Fits Tube Size
501-1400	8"	2" (.083 Wall)

Tube

1 1/4" x 1 3/8"
Rectangular O.D.



Stock Number	Length	Fits Shaft
600-2022	6'	1" x 1 1/8"
604-2022	3'	1" x 1 1/8"


2" Round (.083 Wall)



Stock Number	Length
602-1400	6'
604-1400	3'

Tube Weld Yoke

With Bearing Groove
(Guard must rotate freely on yoke)

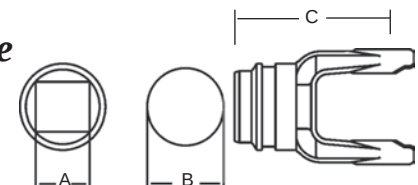


Stock Number	Dim. "A" Bore	Dim. "B" Fits Tube Size	Dim. "C"
700-1400	1 1/4" x 1 3/8"		3 3/8"
701-1400		2" (.083 Wall)	3 7/8"

Implement Yoke

Round Bore


With Keyway & Set Screw

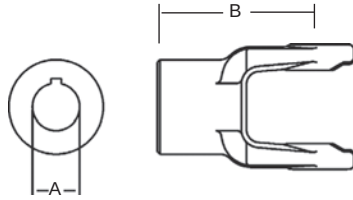

Stock Number	Dim. "A" Bore	Dim. "B"	Standard Keyway
800-1416	1"	3 7/8"	1/4"
800-1418	1 1/8"	3 7/8"	1/4"
800-1419	1 3/16"	3 7/8"	1/4"
800-1420	1 1/4"	3 7/8"	1/4"
800-1422	1 3/8"	3 7/8"	5/16"
800-1423	1 7/16"	3 7/8"	3/8"
800-1424	1 1/2"	3 7/8"	3/8"

Square Bore


With Set Screw

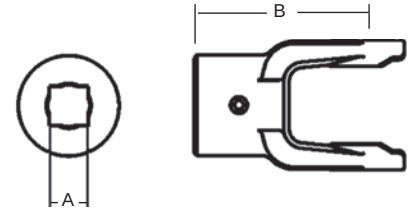

Stock Number	Dim. "A" Bore	Dim. "B"
804-1414	7/8"	3 7/8"
804-1416	1"	3 7/8"
804-1418	1 1/8"	3 7/8"
804-1419	1 3/16"	3 7/8"
804-1420	1 1/4"	3 7/8"

Spline Bore


With 21/64" Pin Hole

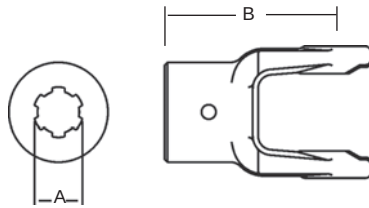

Stock Number	Dim. "A" Bore	Dim. "B"
801-1406	1 3/8" x 6 Spl.	3 7/8"
801-1418	1 1/8" x 6 Spl.	3 7/8"
801-1420	1 1/4" x 6 Spl.	3 7/8"
801-1421	1 3/8" x 21 Spl.	3 7/8"

Hexagon Bore


With Set Screw

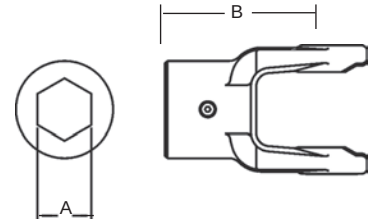

Stock Number	Dim. "A" Bore	Dim. "B"
805-1418	1 1/8"	3 7/8"
805-1420	1 1/4"	3 7/8"

Shear Pin

With 1/4" Pin Hole

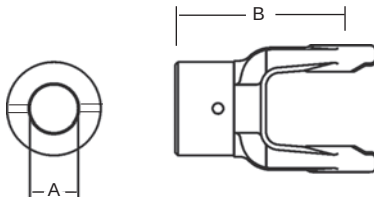


Stock Number	Dim. "A" Bore	Dim. "B"
802-1418	1 1/8"	3 7/8"
802-1420	1 1/4"	3 7/8"
802-1422*	1 3/8"	3 7/8"
802-1424	1 1/2"	3 7/8"

* with 1/4" and 1/2" Pin Hole

Round Bore


Double Keyway & Set Screw

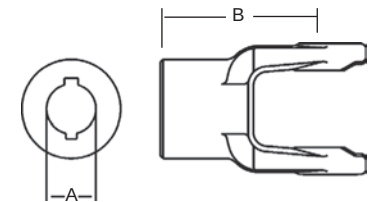

Stock Number	Dim. "A" Bore	Double Keyway	Dim. "B"
806-1418	1 1/8"	1/4" & 5/16"	3 7/8"
806-1419	1 3/16"	1/4" & 5/16"	3 7/8"
806-1420	1 1/4"	1/4" & 5/16"	3 7/8"

Torque Limiter Flange


(Interchanges with Great Lakes Clutch)



Stock Number	Dim. "A"
803-1400	4 1/2"

Stock Bore

With Hub O. D. Turned

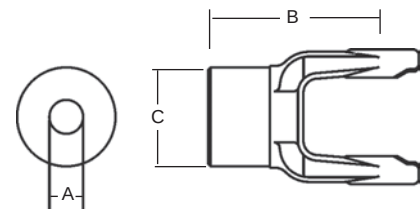


Stock Number	Dim. "A" Bore	Dim. "B"	Dim. "C"
809-1412	3/4"	3 7/8"	2 1/8"

14 Series (cont'd.)

Guard

Order Bearings As Required

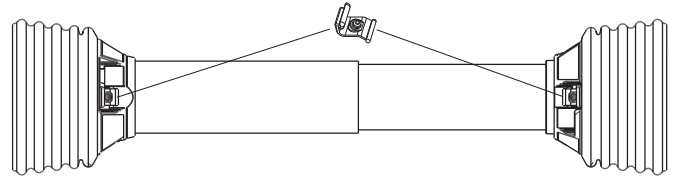


Stock Number	Overall Driveline Length	Bearing Kit (4-per kit)
900-2548	48"	921-1200
900-2560	60"	921-1200

Assembly instructions included with guard bearing kit

NOTE: Guards must rotate freely on yokes


Yoke & Shaft Assembly

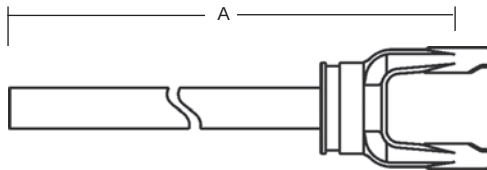

1" x 1 1/8" Shaft

Stock Number	Dim. "A"
10001438	26.12"
10001448	35.62"
10001460	47.62"

Yoke, Tube & Sleeve Assembly

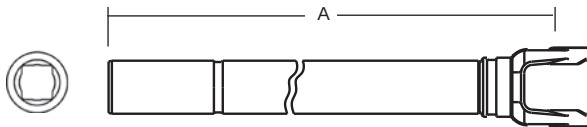

1" x 1 1/8" Rectangular

Stock Number	Dim. "A"
11001438	26.12"
11001448	36.12"
11001460	48.12"

Easy Lock™ Replacement Kit

Part Number: 13005000 (4-per Kit)




Guard Chain Kit

Insert the "S" hook through the guard loop and crimp shut



Part Number: 13006500 (2-per Kit)

Universal Joint

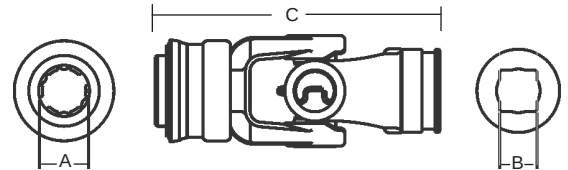


Spring-Lok to Shaft Weld Yoke

Repair Kit — 13003100


Stock Number	Dim. "A" Bore	Dim. "B" Bore	Dim. "C"
15061400	1 3/8" x 6 Spl.	1" x 1 1/8" Rect.	7 3/4"

Drivelines

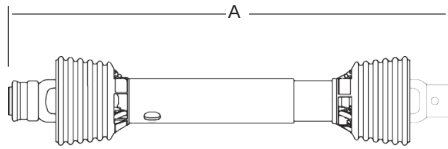


Drivelines are furnished without Cross & Bearing Kit and Implement Yoke. Select kit and implement yoke as required. When cross & bearing kit and implement yoke are assembled, the overall compressed length of the driveline will be 48" or 60".

Stock Number	Tractor Yoke	Overall Compressed Length Dim. "A"	Max. Running Length
14001448	1 3/8" x 6 Spl. Spring Lok	48"	75"
14001460	1 3/8" x 6 Spl. Spring Lok	60"	99"

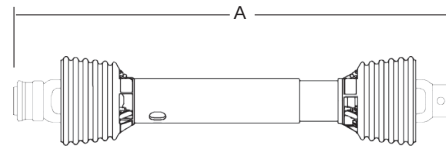

Drivelines are furnished without Cross & Bearing Kit and Outboard Yoke. Select kit and outboard yokes as required. When cross & bearing kit and outboard yokes are assembled, the overall compressed length of the driveline will be 48" or 60".

Stock Number	Overall Compressed Length Dim. "A"	Max. Running Length
14011448	48"	75"
14011460	60"	99"
14021448 (With crosses installed)	48"	75"

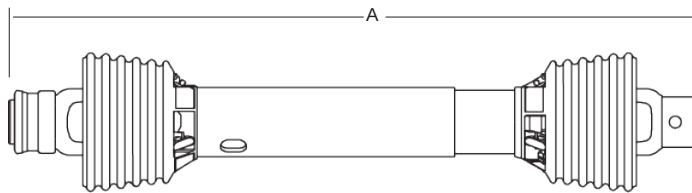

Stock Number	Tractor Yoke	Implement Yoke	Overall Compressed Length Dim. "A"	Max. Running Length	Application
14001404	1 3/8" x 6 Spl. Spring-Lok	1 3/8" Round 1/2" Shear Pin Hole	30 3/16"	39.5"	4 ft. Lift Type Rotary Cutter
14001405	1 3/8" x 6 Spl. Spring-Lok	1 3/8" Round 1/2" Shear Pin Hole	37 3/16"	53.5"	5 ft. Lift Type Rotary Cutter
14001406	1 3/8" x 6 Spl. Spring-Lok	1 3/8" Round 1/2" Shear Pin Hole	56 3/16"	76.5"	5 & 6 ft. Pull Type Rotary Cutter
14001420	1 3/8" x 6 Spl. Spring-Lok	1 1/4" Round 1/4" Keyway	48"	75"	Auger