








WELDMATIC[®] (270)

P/N: CP146-1

A Single Phase MIG Package That's Big On Power.

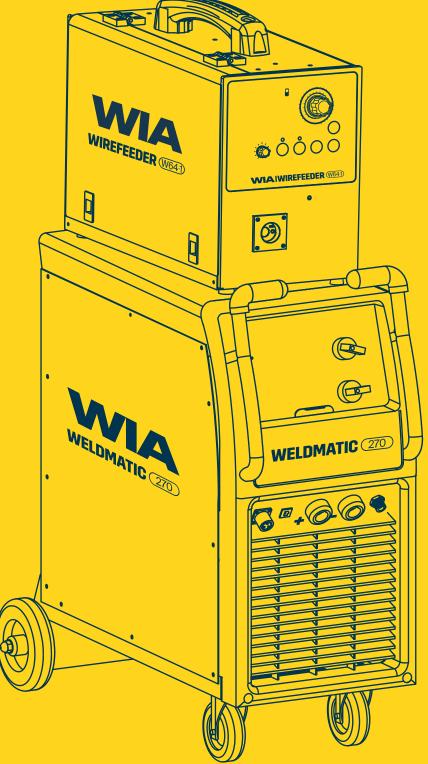





WELDING.COM.AU





MIG WELDER



WELDMATIC[®] (270)

A Single Phase MIG Package That's Big On Power.

The Weldmatic 270 is the most powerful WIA single phase MIG welding machine. Ideal for light to medium industrial fabrication and rural workshops the 270 outperforms its competition when it comes to welding performance. Packed with professional features you'd expect in an industrial 3 phase MIG machine, the 270 is for serious welders who want results.

Featuring a Fan-on-Demand[™] cooling system, the Weldmatic 270 improves efficiency, reduces maintenance and provides a safer working environment. Built with quality components and manufactured with 3 years warranty, the Weldmatic 270 can withstand tough Australian conditions.

SUITABLE APPLICATIONS

Rural Workshops

Light to Medium Fabrication

Body Shops and Maintenance

WELDABLE MATERIALS

Steel

Stainless Steel | Aluminium

PACKAGE INCLUDES



SPECIFICATIONS

Primary Voltage	Rated Primary Current	Max Primary Current	Recommended Generator Power	Supply Plug
240 VAC-50/60Hz	25.3 Amps	56 Amps	13.5 kVa	15 Amp
IP Rating	Weight	Warranty	Standards Compliance	
IP21S	115kg	3 Years	AS60974.1 & AS1674.2 (VRD)	

MIG SPECIFICATION

Output	Rated Output	Wire Size	Material Thickness
Range	@ 40°C (10min)	Range	Range
30A/15.5V-270A/27.5V	270A/27.5V @ 20%	0.6/0.8/0.9/	Welds up to 8mm steel
	150A/21.5V @ 60%	1.2mm	plate, single pass
	120A/20V @ 100%		p



FEATURES

- 270 A single phase MIG welder
- 270 A at 27.5 V 20% Duty Cycle
- Fan-on-Demand[™] Cooling Fan Reduces noise, energy use and contaminates
- Built-In Thermal Protection Prevents the machine from operating beyond its safe thermal zone
- Arc Start modifies arc starting condition, wire accelerates at different speed depending on application
- Four geared wire drive Provides a consistent, smooth, and strong drive for a variety of wires
- Burn Back Controls how far the wire burns back to the tip on completion of the welding operation
- Spot Timer Provides short weld times for repetitive spot welds
- Creep Mode Provides slow wire speed until weld starts - ideal for aluminium starts
- Suitable wires Gas-shielded and gasless flux-cored wires
- Spool capacity Takes 5kg and 15kg spools
- IP21S rating For environmental/safety protection
- Generator compatible 13.5 kVa

BEST USED WITH

Product	Part Number
Austfil T-11	AUST11085KG (0.8mm – 5kg Spool)
Self-Shielded	AUST11095KG (0.9mm – 5 kg Spool)
Flux-Cored Wire	AUST11125kg (1.2mm – 5kg Spool)
Austmig ES6 Mild Steel Wire	ES606M5KG (0.6mm – 5kg Spool) ES608M5KG (0.8mm – 5kg Spool) ES609M5KG (0.9mm – 5kg Spool)
Austmig 5356 Aluminium Wire	M5356092KG (0.9mm – 2kg Spool) M5356102KG (1.0mm - 2kg Spool) M5356122KG (1.2mm - 2kg Spool)
Austfil Excel Gas	AE71CM12 (1.2.mm – 15kg Spool)
Shielded Flux Cored Wire	AE71CM16 (1.6.mm – 15kg Spool)
WIA OpticFX	SH300001 (Nero)
Helmet	SH300002 (Blue Knight)

