


Product Overview





Product Specification Sheet

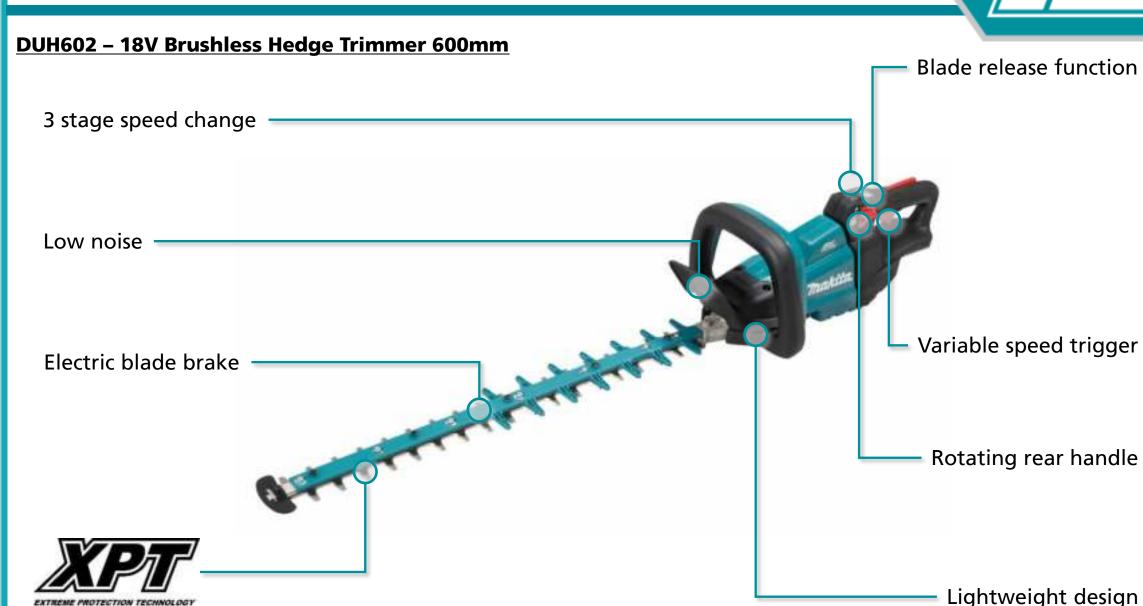

DUH602 - 18V Brushless Hedge Trimmer 600mm




Max. branch diameter	21.5mm
Blade length	600mm
Noise	90dB
No load speed	Hi: 0 - 4,400spm Med: 0 - 0-3,600spm Low: 0 - 2,000spm
Overall length	1,121mm
Skin weight	3.9kg
Weight (with battery)	4.5kg
Voltage	18V

- 3 Stage speed change control panel allows adjustable stroke speed according to operations and the environment
- **Low noise –** noise rating of 90dB
- Electric blade brake quickly brings the blades to a smooth stop so the user can safety resume operation
- Blade release function if the blade was to become jammed the user can press the release button temporarily reversing the blade direction
- Variable speed trigger as well as the 3 stage speed change the user can have full control of the blade speed from the variable speed trigger, similar to a petrol trimmer
- **Rotating rear handle –** handle can be positioned in 5 positions, 0°, 45° and 90° left and right for maximum comfort in various applications
- Lightweight design at only 4.5kg with a 6.0Ah battery compared with the equivalent petrol model at 5.0kg

Product Overview



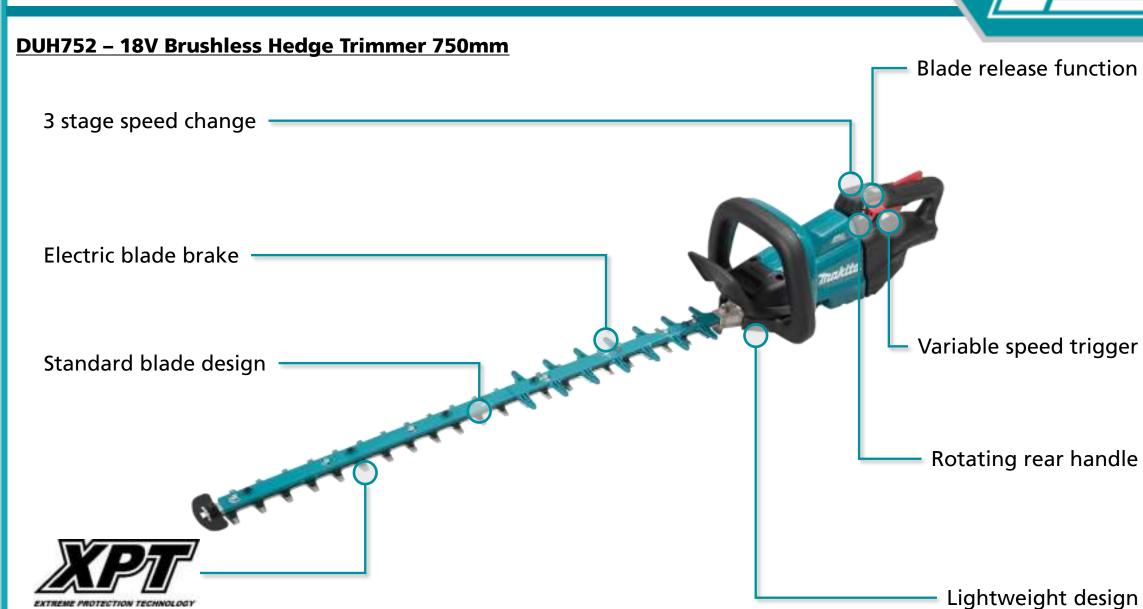

Product Specification Sheet






Max. branch diameter	21.5mm
Blade length	750mm
Noise	93dB
No load speed	Hi: 0 - 4,400spm Med: 0 - 3,600spm Low: 0 - 2,000spm
Overall length	1,261mm
Skin weight	3.9kg
Weight (with battery)	4.5kg
Voltage	18V

- **3 Stage speed change –** control panel allows adjustable stroke speed according to operations and the environment
- **Standard blade design –** features a double reciprocating blade with a flat blade surface
- Electric blade brake quickly brings the blades to a smooth stop so the user can safety resume operation
- Blade release function if the blade was to become jammed the user can press the release button temporarily reversing the blade direction
- Variable speed trigger as well as the 3-stage speed change the user can have full control of the blade speed from the variable speed trigger, similar to a petrol trimmer
- Rotating rear handle handle can be positioned in 5 positions,
 0°, 45° and 90° left and right for maximum comfort in various applications
- **Lightweight design** at only 4.5kg with a battery compared with the equivalent petrol model at 5.0kg

Product Overview



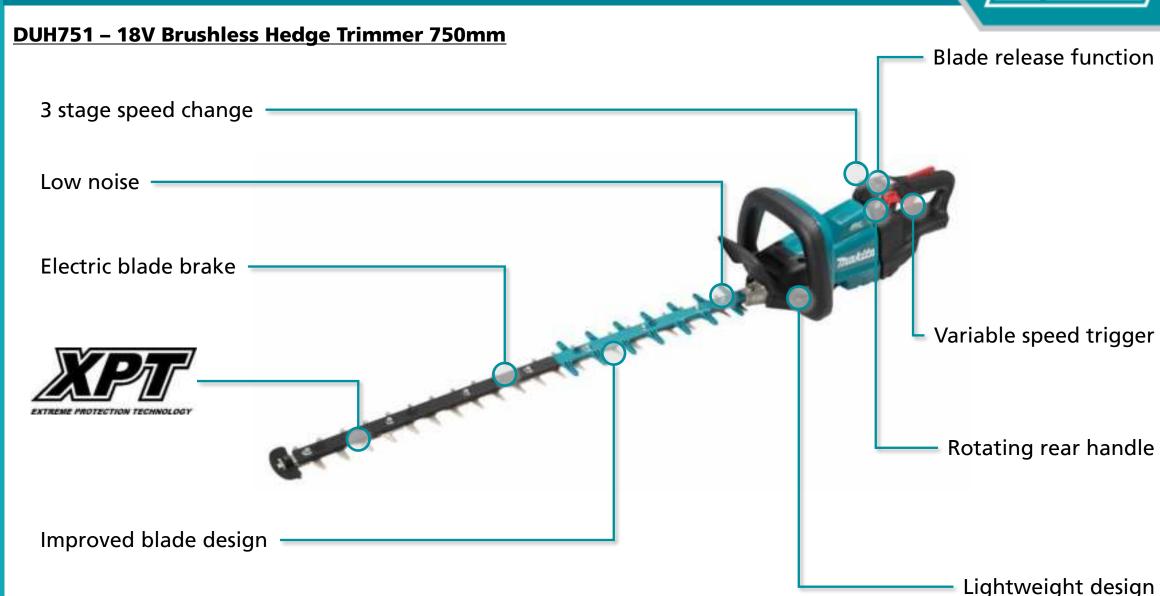

Product Specification Sheet



DUH751 - 18V Brushless Hedge Trimmer 750mm



Max. branch diameter	23.5mm
Blade length	750mm
Noise	93dB
No load speed	Hi: 0 - 4,400spm Med: 0 - 0-3,600spm Low: 0 - 2,000spm
Overall length	1,261mm
Skin weight	3.9kg
Weight (with battery)	4.5kg
Voltage	18V

- **3 Stage speed change** control panel allows adjustable stroke speed according to operations and the environment
- **Low noise –** noise rating of 93dB
- Electric blade brake quickly brings the blades to a smooth stop so the user can safety resume operation
- Improved blade design new shape blade, designed specifically for cordless trimmers reduces resistance and increases runtime
- **Blade release function** if the blade was to become jammed the user can press the release button temporarily reversing the blade direction
- Variable speed trigger as well as the 3 stage speed change the user can have full control of the blade speed from the variable speed trigger, similar to a petrol trimmer
- Rotating rear handle handle can be positioned in 5 positions, 0°,
 45° and 90° left and right for maximum comfort in various applications
- **Lightweight design** at only 4.5kg with a 6.0Ah battery compared with the equivalent petrol model at 5.0kg

Advantages



Performance



18V Brushless Motor provides up to 4,400spm

Convenience



Rotating rear handle for maximum comfort in a variety of applications

Innovation



Anti-vibration structure reduces vibration for comfortable prolonged use

Comfort



24% lighter in weight then the petrol equivalent

Advantages




Change in Blade Design

DUH751 – Featured the double reciprocating curved blade which produced less friction resulting in cleaner and efficient cutting with more cuts per charge.

DUH752 – Features the double reciprocating blade however the blade surfaces are flat meaning more friction will be created during the cutting process.

Difference in Runtime

	DUH751	DUH752
High	45mins	40mins
Medium	70mins	60mins
Low	160mins	150mins

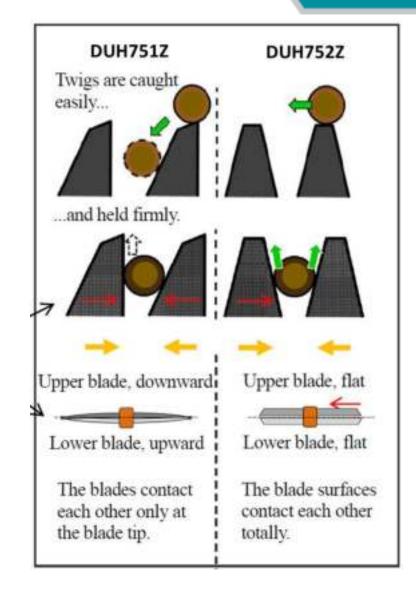

Our Range



	DUH507	DUH606	DUH602	DUH752	DUH751
		And the second s	And the second s	A STATE OF THE STA	
Motor	Brushed	Brushless	Brushless	Brushless	Brushless
Max. branch diameter	15mm	20mm	21.5mm	21.5mm	23.5mm
Blade length	500mm	600mm	600mm	750mm	750mm
Blade Type	Double Reciprocating, Flat Blade	Double Reciprocating, Flat Blade	Double Reciprocating, Flat Blade	Double Reciprocating, Flat Blade	Double Reciprocating, Curved Blade
No load speed	2,700spm	4,000spm	Lo: 0-2,000spm Med: 0-3,600spm High: 0-4,400spm	Lo: 0-2,000spm Med: 0-3,600spm High: 0-4,400spm	Lo: 0-2,000spm Med: 0-3,600spm High: 0-4,400spm
Overall length	925mm	1,015mm	1,121mm	1,261mm	1,261mm
Skin weight	2.4kg	2.5kg	3.9kg	3.9kg	3.9kg
Voltage	18V	18V	18V	18V	18V

Accessories



Standard Accessories		
-	459121-9	Blade Cover 600
To the state of th	412912-9	Blade Cover 750
Same of the Print of the Party	191R57-1	Standard Blade Assembly 600mm
Samuel Control of the	191R54-7	Low friction blade assembly 750mm
O proportion of the property of the last o	191R58-9	Standard Blade Assembly 750mm

Optional Equipment			
San Control of the Co	191R53-9	Low Friction Blade Assembly 600mm	
	B-90613	Clean & Lube Spray 300gm	