



# ENDURO SPIRAL HOSE

WITH SUPERTUFF (ST)  
MSHA COVER



**Hydraulink<sup>®</sup>**

Hose Solutions

# ENDURO SPIRAL HOSE

Hydraulink are pleased to introduce our new **ENDURO spiral hose** range.

**ENDURO spiral** is an extremely flexible slim profile hose featuring our very high wear and abrasion resistant SuperTuff (ST) MSHA cover for increased protection against abrasion in severe operating environments.


The new **ENDURO** hoses have been specifically developed for demanding applications and are an ideal choice for applications in **Mining, Forestry, Earthmoving and Construction.**

**ENDURO** hoses are designed to increase service life, lower maintenance costs, and reduce downtime - without loss of flexibility or bend radius.

**TESTED TO 1 MILLION  
IMPULSE CYCLES**

**ENDURO 5000**

**ENDURO 6000**

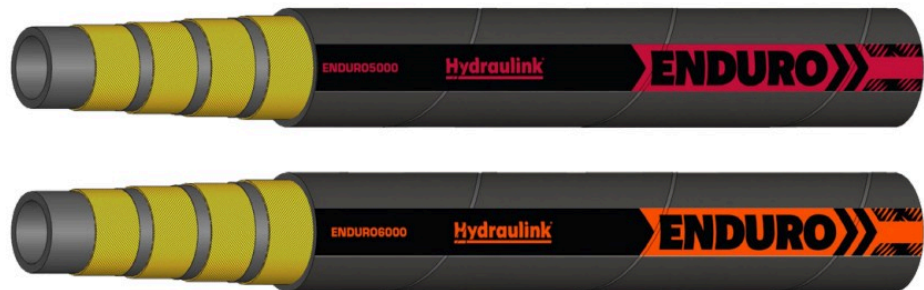



## SPECIFICATIONS

- NBR Tube compatible with mineral oil-based hydraulic fluids and bio-degradable hydraulic fluids.
- SuperTuff (ST) cover exceeds ISO standard abrasion resistance requirements by 10 times.
- MSHA cover meets Flame Resistance and Antistatic specifications of ISO 6805/ MDG41/ RS23 for mining applications.
- Exceeds ISO 18752 – CC, SAE 100R13/R15.
- Flexible up to 1/2 SAE minimum bend radius.
- Impulse tested up to 1 million cycles.
- Four spiral wire construction for Enduro 5000 up to -24 size and Enduro 6000 up to -20 size.
- Six spiral wire construction for Enduro 5000 -32 and Enduro 6000 -24.

### ENDURO 5000-06 **Hydraulink** **ENDURO** DN 10 3/8" WP 380 BAR 5510 PSI ISO 18572-CC MSHA

HOSE TYPE	ENDURO 5000 EXCEEDS ISO 18752 – CC/SAE 100R13								
Dash Size	-6	-8	-10	-12	-16	-20	-24	-32	
OD (mm)	20.2	22.9	26.5	30.5	37.9	45.9	53.4	71.5	
BR (mm)	65	90	100	120	150	210	250	540	
MWP (bar/psi)	380/5510	380/5510	380/5510	380/5510	350/5075	350/5075	350/5075	350/5075	
Wire Layers	4	4	4	4	4	4	4	6	

### ENDURO 6000-06 **Hydraulink** **ENDURO** DN 10 3/8" WP 420 BAR 6090 PSI ISO 18572-CC EXCEEDS SAE100 R15 MSHA

HOSE TYPE	ENDURO 6000 EXCEEDS ISO 18752 – CC/SAE 100R15								
Dash Size	-6	-8	-10	-12	-16	-20	-24		
OD (mm)	20.2	22.9	26.5	30.5	37.5	47.3	57.4		
BR (mm)	65	90	100	120	150	400	460		
MWP (bar/psi)	420/6100	420/6100	420/6100	420/6100	420/6100	420/6100	420/6100		
Wire Layers	4	4	4	4	4	4	6		





#### **AUSTRALIA HEAD OFFICE**

Hydraulink Australia Pty Limited  
123 Long St  
Smithfield  
NSW 2164  
P +61 2 8785 4600  
F +61 2 8785 4626  
1300 36 37 34  
[hydraulink.com.au](http://hydraulink.com.au)

#### **NEW ZEALAND HEAD OFFICE**

Hydraulink Fluid Connectors Ltd  
21 O'Rorke Road  
Penrose  
Auckland 1061  
P +64 9 525 2626  
F +64 9 525 2151  
0800 80 66 66  
[hydraulink.com](http://hydraulink.com)

#### **INDONESIA HEAD OFFICE**

Hydraulink Indonesia  
World Trade Center 5  
Building 3Ath Floor,  
Jl. Jend Sudirman Kav 29-31  
Jakarta 12920  
Indonesia  
P +62 21 2598 5017  
[hydraulink.com.au](http://hydraulink.com.au)

**HYDRAULINK HAS OVER 400 SERVICE CENTRE POINTS  
ACROSS NEW ZEALAND, AUSTRALIA, AND THE ASIA PACIFIC.**

Visit [www.hydraulink.com](http://www.hydraulink.com) to find your nearest dealer.