



Collier & Miller Quick Hitches are designed and manufactured in NSW, Australia to enhance on-farm productivity when switching three-point linkage implements. Our premium hitches provide a secure, dependable, and efficient solution for changing over linkage-mounted attachments.

These Quick Hitches are offered in both standard and heavy-duty versions, catering to a wide range of Cat-3/Cat-4 model tractors.




FEATURES & BENEFITS

- Quality Australian design and construction
- Positive locking mechanism on all pins
- High tensile, zinc passivated pins and bolts
- Powder coated finish
- Category 3 and 4 models available



All C&M machinery is Australian made and designed in Collier & Miller's state-of-the-art engineering workshop in Griffith, New South Wales. With more than 75 years' experience, Collier & Miller's engineering division is one of Australia's most experienced producers of quality, specialist agricultural machinery.

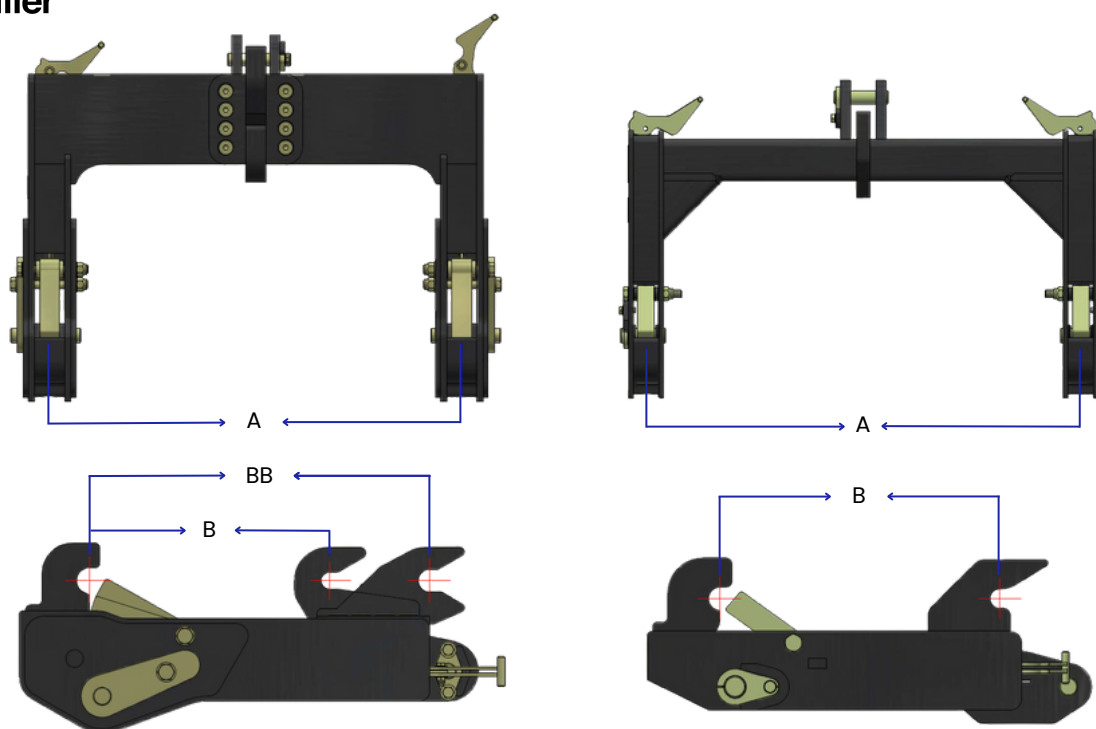

MODEL	QH	QH2	QHHD	QHHD34	QHSD	QHF	QHSD4	QHSD4W
DESCRIPTION	Quick Hitch Cat 3 Tractor and Implement	Quick Hitch Cat 2 Tractor and Cat 3 Implement	Quick Hitch Heavy Duty Cat 3 Tractor and Implement	Quick Hitch Heavy Duty Cat 4 Tractor and Cat 3 Implement	Quick Hitch Super Duty Cat 3 Tractor and Cat 3 - 4 Implement	Front Quick Hitch Cat 3 Narrow Tractor and Cat 3 Implement	Quick Hitch Super Duty Cat 4 Tractor and Cat 3 - 4 Implement	Quick Hitch Super Duty Cat 4 Wide Tractor and Implement
LOCK DEVICE	Spring Loaded Lug	Spring Loaded Lug	Spring Loaded Lug	Spring Loaded Lug	Spring Loaded Lug	Pin Held Lug	Spring Loaded Lug	Spring Loaded Lug
TRACTOR SIDE LINKAGE	Cat 3	Cat 2	Cat 3	Cat 4	Cat 3	Cat 3 Narrow	Cat 4	Cat 4 Wide
IMPLEMENT SIDE LINKAGE	Cat 3	Cat 3	Cat 3	Cat 3	Cat 3/ Cat 4	Cat 3	Cat 3/ Cat 4	Cat 4 Wide
BOTTOM LIFTING LUG CENTRES	A = 1,040mm	A = 1,040mm	A = 1,040mm	A = 1,040mm	A = 1,040mm	A = 1,040mm	A = 1,040mm	A = 1,256mm
BOTTOM LIFT LUG TO TOP LIFT LUG CENTRE	B = 478mm	B = 478mm	B = 478mm	B = 478mm	B = 478mm BB = 678mm	B = 478mm	B = 478mm BB = 678mm	B = 678mm
BOTTOM PIN DIA	1-7/16"	1-7/16"	1-7/16"	1-7/16"	2"	1-7/16"	2"	2"
TOP PIN DIA	1-1/4"	1-1/4"	1-1/4"	1-1/4"	1-1/4" 1-3/4"	1-1/4"	1-3/4"	1-3/4"
WEIGHT	105 kg	105 kg	145 kg	150 kg	280 kg	145 kg	280 kg	285 kg
POWDER COATED	YES	YES	YES	YES	YES	YES	YES	YES
SUITABLE HP TRACTOR	UP TO 220HP	UP TO 220HP	200-400HP	200-400HP	OVER 400HP	220HP	OVER 400HP	OVER 400HP
CERTIFIED CARRYING CAPACITY	7,000 kg	7,000 kg	10,000 kg	10,000 kg	12,000 kg	7,000 kg	12,000 kg	12,000 kg