



## FEATURES

- SRE Series single row LED bar lights produce up to 12600lm of instant light output
- Available in 12", 22", 32" models
- 5W Osram LED's produce super white light close to daylight
- Multi-volt 11-32V DC input & low current draw
- 50,000 hour LED lifespan with solid state technology
- Thermal management technology
- Light weight tough die-cast aluminium housing & polycarbonate lens
- Water & dust proof IP68 rated
- Simple 2 wire installation with Deutsch plug
- Low profile slide & end mounts
- Over/under voltage, reverse polarity protection & EMI/EMC radio interference approved

LED BAR LIGHT



THERMAL  
MANAGEMENT  
TECHNOLOGY



MULTI-VOLT  
11-32 VDC



POLYCARB  
LENS



COLOUR  
TEMP



WATERPROOF



OVER/UNDER  
VOLTAGE  
PROTECTION



REVERSE  
POLARITY  
PROTECTION



DEUTSCH  
CONNECTOR



OSRAM  
LEDS



RADIO  
INTERFERENCE  
APPROVED



3 YEAR  
WARRANTY


The Roadvision Essentials Series LED bar lights are the ideal choice for those chasing value for money without compromising on quality. Utilising high performing 5W Osram LED's, Thermal Management Technology, packaged in an IP68 rated housing and shielded behind a polycarbonate lens, these bar lights are built to endure the toughest conditions. The Essentials Series single row LED bar lights produce up to 12600lm of instant light output. With the perfect combination of spot and driving optics, they produce combination style beam patterns reaching up to 623 meters @ 1 LUX. Available in the most common 12", 22" & 32" lengths, they are a perfect entry level solution while still providing great output, durability and the perfect look for your rig.

## PART NUMBERS




### RBLW3120C

12" LED Bar Light 11-32V 50W  
Combination Beam

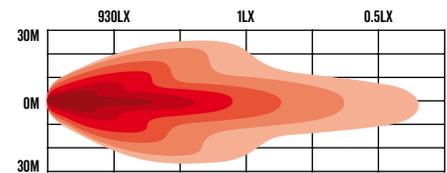


### RBLW3220C

22" LED Bar Light 11-32V 100W  
Combination Beam

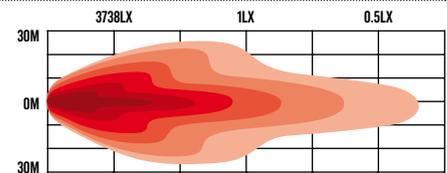

### RBLW3320C

32" LED Bar Light 11-32V 150W  
Combination Beam

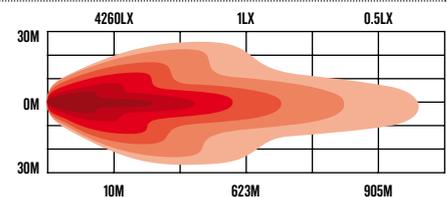



SPECIFICATIONS	RBLW3120C	RBLW3220C	RBLW3320C
BEAM PATTERN	Combination	Combination	Combination
MAXIMUM LUMENS	4200lm	8400lm	12600lm
MAXIMUM LUX @ 10M	930lx	3738lx	4260lx
MAXIMUM BEAM DISTANCE @ 0.5LX	431m	740m	905m
MAXIMUM BEAM DISTANCE @ 1LX	305m	523m	623m
INPUT VOLTAGE	11-32VDC	11-32VDC	11-32VDC
MAXIMUM WATTS	50W	100W	150W
NUMBER OF LEDS	10 x 5W Osram	20 x 5W Osram	30 x 5W Osram
CURRENT DRAW @ 13.8V	3.0~3.6 Amps	6.0~7.2 Amps	9.0~10.7 Amps
LENS CONSTRUCTION	Polycarbonate	Polycarbonate	Polycarbonate
HOUSING CONSTRUCTION	Die-Cast Aluminium	Die-Cast Aluminium	Die-Cast Aluminium
WIRING	2 Pin Deutsch Plug	2 Pin Deutsch Plug	2 Pin Deutsch Plug
DIMENSIONS AXBXC	353 x 63 x 62mm	601 x 63 x 62mm	849 x 63 x 62mm

#### LINE DIAGRAM

