



DTD201Z

18V Brushless 4-Stage
Impact Driver



Product Statement



18V Brushless 4-Stage Impact Driver

The DTD201 is an 18V Brushless 4-Stage Impact Driver designed to deliver exceptional torque, high speed and performance in heavy-duty applications. Powered by Makita's reliable 18V LXT battery platform, it delivers up to 210Nm in fastening torque with a high speed rotation of 3,700rpm, with a one-touch bit installation to keep you working faster and more efficiently.

Featuring a brushless motor for consistent performance, the tool is equipped with four selectable speed settings, making it easy to adjust the tool for a wide range of applications. With an additional T-mode, which drives self-drilling screws into thin metal sheets at high speed, then stops after the tool starts to impact to prevent over-tightening.

The DTD201 also features an anti-bit wobbling structure that ensures enhanced stability during fastening, and an improved compact design to minimise fatigue during extended use. The DTD201 is the ideal solution for delivering high speed and powerful performance over extended periods.



Product Overview



DBN640ZK

One-touch bit
installation

LED joblight

Max fastening torque: 210 N·m
High-speed rotation: 3,700min-1

XPT
EXTREME PROTECTION TECHNOLOGY

BL
MOTOR

Variable speed control by
trigger

Anti-bit wobbling structure

4-stage impact power selection
+ T-mode (for thin metal sheets only)



Product Specifications



DTD201Z	
Max. capacities standard bolt	M5 -M16
Max. capacities high tensile bolt	M5 -M14
No load speed	Max: 0 - 3,700rpm
	Hard: 0 - 3,200rpm
	Medium: 0 - 2,100rpm
	Soft: 0 - 1,100rpm
Impact rate	Max: 0 - 4,400rpm
	Hard: 0 - 4,200rpm
	Medium: 0 - 3,600rpm
	Soft: 0 - 2,000rpm
Max. tightening torque	Max.: 210Nm
	Hard: 190Nm
	Med: 150Nm
	Soft: 20Nm
Drive shank	6.35mm (1/4") Hex
Overall length	121mm
Skin weight	1.0kg
Weight (with battery)	1.7kg (BL1860B)
Voltage	18V

- **18V Max Brushless Motor** – Delivers up to 210 Nm of fastening torque and a high-speed rotation of 3,700 rpm
- **4-stage impact power selection + T-mode** – Four selectable speed settings make it easy to adjust the tool for a wide range of applications. T-mode drives self-drilling screws into thin metal at high speed, then stops after the tool starts to impact to prevent over-tightening.
- **LED job light** – Twin LED job light provides bright illumination with preglow and afterglow functions for enhanced visibility.
- **Variable speed trigger** – The variable speed trigger allows for speed adjustments based on the material or application.
- **Anti-bit wobbling structure** – Anti-bit wobbling structure ensures enhanced stability during fastening.
- **Compact design** – Compact design measuring 121mm in length for easy access in tight spaces
- **One-touch bit installation** – One-touch bit installation ensures smoother installation and reduces the chance of the bit coming loose.

Advantages



POWER


UP TO 210NM MAX FASTENING TORQUE

SPEED

UP TO 3,700RPM NO LOAD SPEED WITH 4 STAGE SPEED SELECTOR & T-MODE

EFFICIENCY

UP TO 4,400 IMPACTS PER MINUTE ENHANCED ANVIL STABILITY FOR LESS BIT WOBBLE

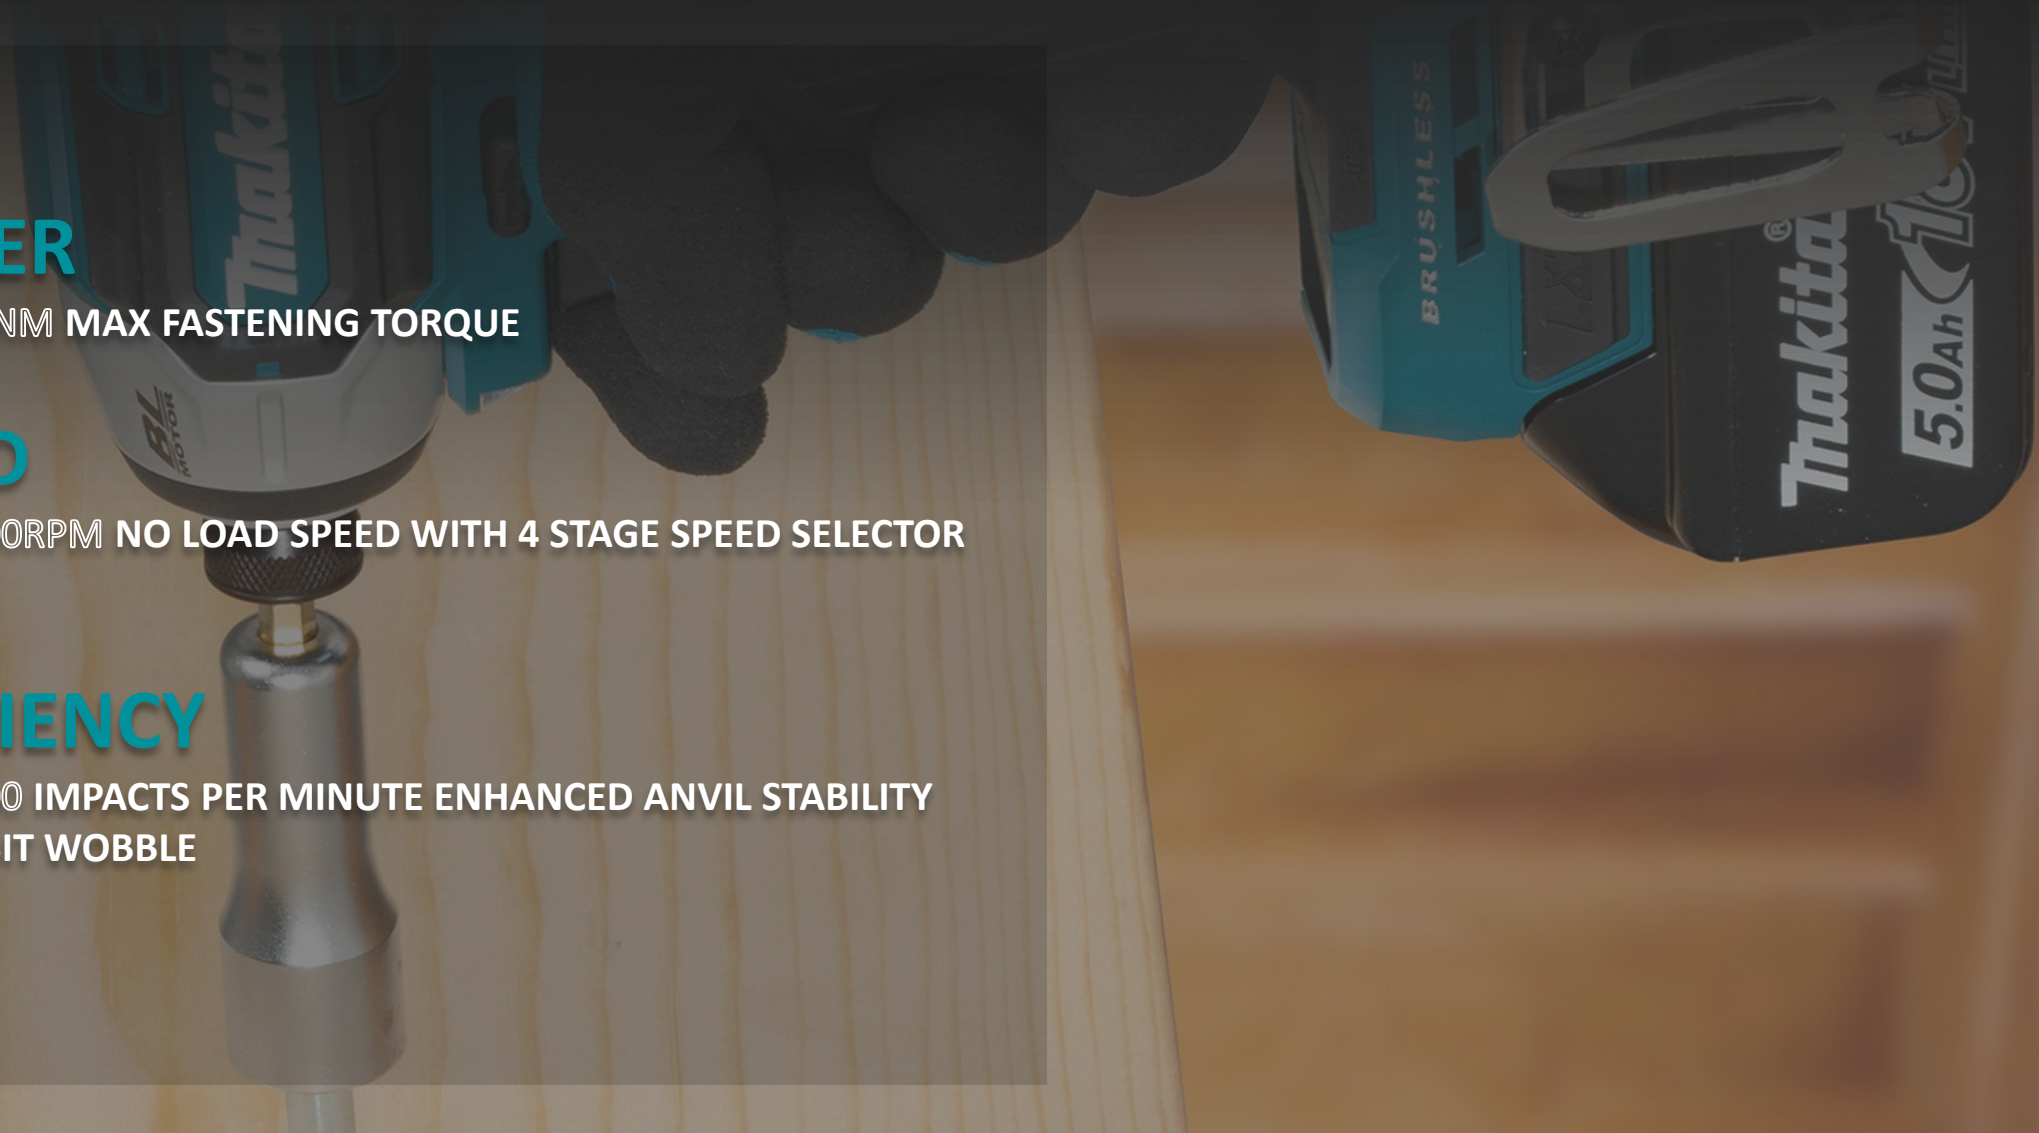

Changing the impact force

You can change the impact force in five steps: 4 (max), 3 (hard), 2 (medium), 1 (soft) and T mode.

“T” is a special mode for fastening self-drilling screws. This mode helps to prevent the screws from over-tightening. The tool drives a screw with high-speed rotation and stops soon after the tool starts to impact.

Mode	Maximum blows	Purpose	Example of application
4	4,400bpm	Tightening with the maximum force and speed.	Driving screws to underwork materials, tightening long screws or bolts.
3	4,200bpm	Tightening with less force and speed than Max mode (easier to control than Max mode).	Driving screws to underwork materials, tightening bolts.
2	3,600bpm	Tightening when a good finishing is needed.	Driving screws to finishing boards or plaster boards.
1	2,000bpm	Tightening with less force to avoid screw thread breakage.	Tightening sash screws or small screws such as M6.
T mode	The tool stops rotating soon after impact starts	Driving self-drilling screws to a thin metal plate with good finish.	Tightening self-drilling screws.

Our Range



	DTD201Z	DTD154Z	TD003GZ	TD004
				
	18V Brushless 4-Stage Impact Driver	Discontinued 18V Mobile Brushless Mode Impact Driver	40V Max Brushless Impact Driver	40V Max Brushless Impact Driver
Max. capacities standard bolt	M5 -M16	M5 -M16	M5 - M16	M5-M20
Max. capacities high tensile bolt	M5 -M14	M5 -M14	M5 - M14	M5-M14
No load speed	Max: 0 - 3,700rpm Hard: 0 - 3,200rpm Medium: 0 - 2,100rpm Soft: 0 - 1,100rpm	Hard: 0 - 3,600rpm Med: 0 - 2,100rpm Soft: 0 - 1,100rpm	Max.: 0 - 3,700rpm Hard: 0 - 3,200rpm Med: 0 - 2,100rpm Soft: 0 - 1,100rpm	Max.: 0 - 3,900rpm Hard: 0 - 3,000rpm Med: 0 - 2,100rpm Soft: 0 - 1,200rpm
Impact rate	Max: 0 - 4,400rpm Hard: 0 - 4,200rpm Medium: 0 - 3,600rpm Soft: 0 - 2,000rpm	Hard: 0 - 3,800ipm Med: 0 - 2,600ipm Soft: 0 - 1,100ipm	Max.: 0 - 4,100ipm Hard: 0 - 3,600ipm Med: 0 - 2,600ipm Soft: 0 - 1,400ipm	Max.: 0 - 3,900ipm Hard: 0 - 3,600ipm Med: 0 - 3,100ipm Soft: 0 - 1,900ipm
Max. tightening torque	Max.: 210Nm Hard: 190Nm Med: 150Nm Soft: 20Nm	175Nm	Max.: 210Nm Hard: 170Nm Med: 50Nm Soft: 20Nm	Hard: 210Nm Med: 130Nm Soft: 60Nm
Drive shank	6.35mm (1/4") Hex	6.35mm(1/4")Hex	6.35mm (1/4") Hex	6.35mm (1/4") Hex
Overall length	121mm	117mm	121mm	136mm
Skin weight	1.0kg	0.9kg	1.0kg	1.2kg
Weight (with battery)	1.7kg (BL1860B)	1.5kg	2.0kg (BL4040)	2.2kg (BL4040)
Voltage	18V	18V	40V Max	40V Max

Accessories



STANDARD ACCESSORIES



266622-8

Truss head screw M4X12



346317-0

Hook

OPTIONAL ACCESSORIES



784634-4



784643-3

Chuck Adaptor




D-58877
B-49828

Drill & Driver Combination Kit


Carpentry Solutions



Click through to view related product categories

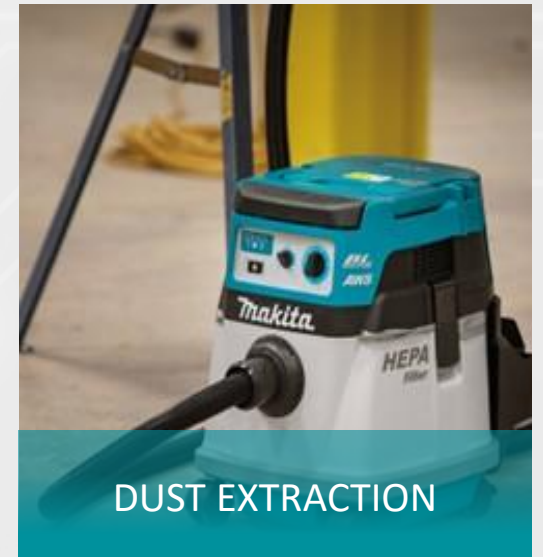

Storage

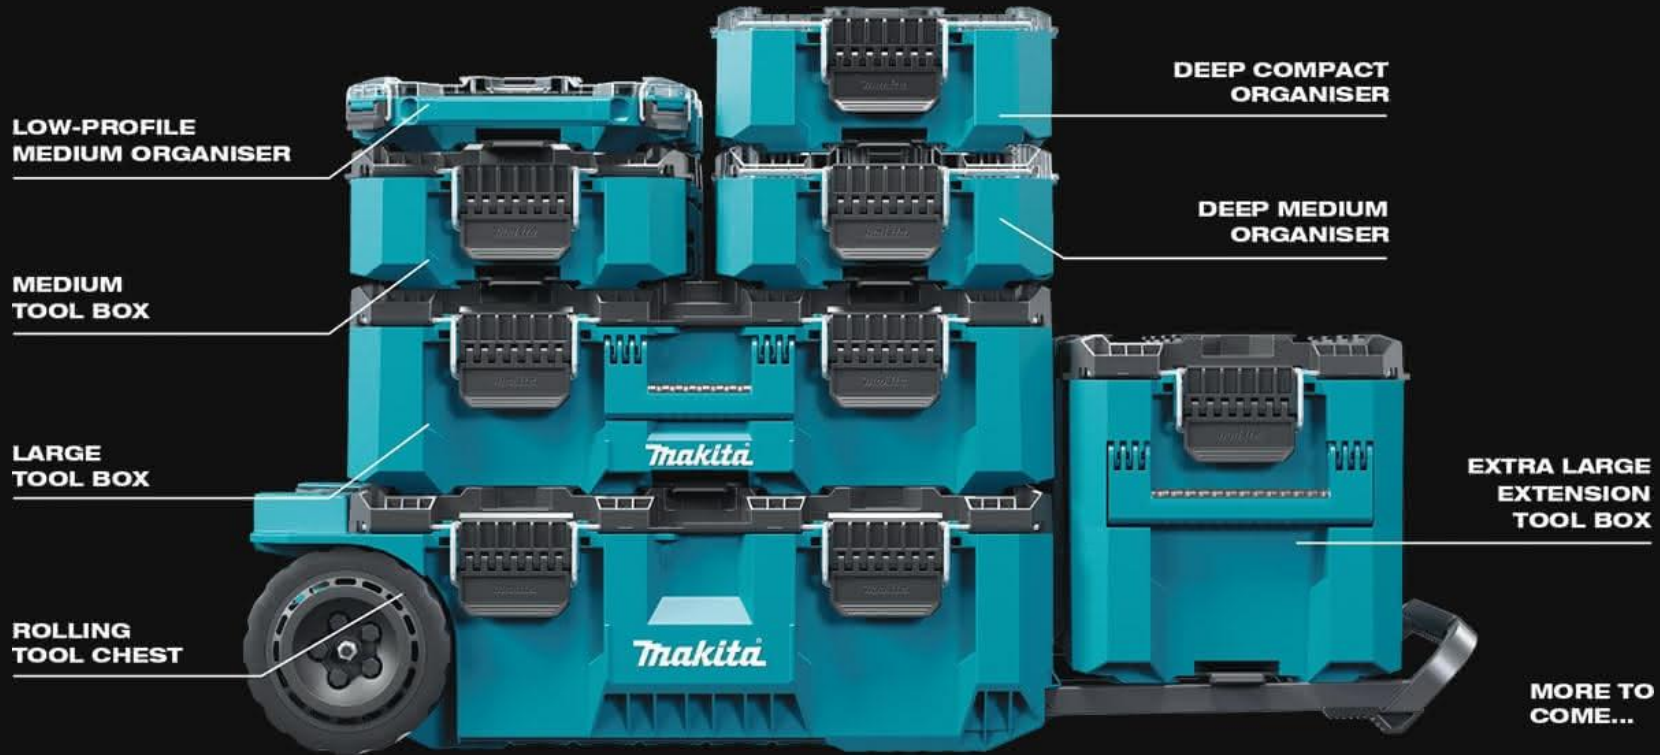

MORE TO
COME...




TRANSPORT

EFFICIENT LOADING
AND UNLOADING



ACCESS

OPEN ANY BOX
WITHOUT UNSTACKING

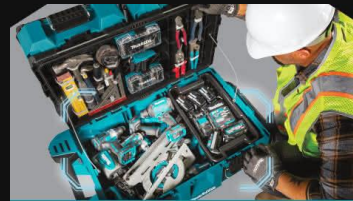

STORE

SPACE FOR LARGER TOOLS
AND ACCESSORIES*



ORGANISE

CUSTOMISE YOUR OWN
CONFIGURATION*

