

2500 WATT PURE SINE WAVE DIGITAL INVERTER GENERATOR


Maxwatt® digital inverter generators offer the best in portable power while being light to carry, fuel efficient and super silent. Besides the electrical output being able to power all sensitive electronic equipment, our generators are also an essential part of recreational caravanning and camping AND also useful for home use as a backup power supply.

STANDARD FEATURES:

- 2500 Starting Watts /2200 Running Watts.
- 98 cc Petrol Engine.
- Parallel Ready with no parallel box required.
- 2 x 15 Amp IP44 weatherproof outlets.
- Digital Display indicating Voltage, Frequency, Total Running Hours.
- 5V 2.1 Amp USB Outlet.
- 4 L Fuel Tank Capacity.
- 5 Hours Run time at 50% load or 3 hours at 100% load.
- 63 db Noise Level at 75% Load.
- Recoil Starting Method.
- 2 Year Maxwatt® Warranty.



Control Panel Functions

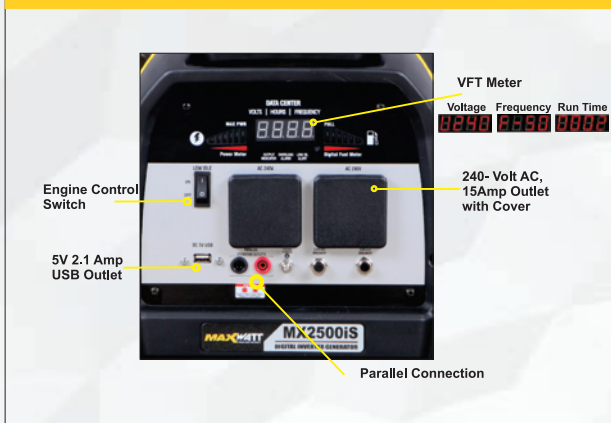

DOUBLE POWER
WITH PARALLEL CONNECTIVITY



2500W

MAXIMUM RATED OUTPUT



2 YEAR

WARRANTY

MX2500IS

ADDITIONAL FEATURES AND BENEFITS

- Digital Inverter Technology
- Pure sine wave inverter technology
- Parallel connection cable included
- No parallel box required
- Low Noise at 63DB
- 2.1 AMP USB Output
- Economy Low Idle Setting
- Smart Engine Control that reduces engine speed, depending on size of the load for better fuel efficiency.
- 2500W maximum output is one of the highest in its class that enables it to efficiently power up multiple electrical devices.
- Lightweight and portable at only 23.5kgs.
- It has a non-slip and ergonomically designed handle.
- The running time at 5 hrs at 50% load and 3 hrs at 100% load is achieved with the help of a 4 litre fuel tank.
- The pure sine wave technology not only safely powers sensitive equipment, it is also compliant with Australian EPA emission controls.
- It is a no fuss generator that is simply plug in and use – no assembly required.
- We offer a 2 year warranty to safeguard your investment.

SPECIFICATIONS

Voltage (V)	240
Amperage (A)	9.16
Displacement (cc)	98
Fuel Tank Capacity (L)	4
Noise Level (db's) at 7 m	63
Rate Power (watts)	2200
Max. Power (watts)	2500
Weight (net) (kg)	23.5
Ignition	Recoil Start
Rate Frequency (Hz)	50
Running Time @ 50% Load (hrs)	5
Running time @ 100% load (hrs)	3

REPAIRS AND TECHNICAL INFORMATION

www.maxwatt.com.au OR customercare@maxwatt.com.au



Generator Dimensions:

505mm L
314mm W
498mm H
23.5kg Weight

Box Dimensions:

575mm L
375mm W
550mm H
26kg Weight

2
YEAR
WARRANTY