



DISC BANKER

Our heavy-duty Disc Banker is a fast and efficient solution for building or renovating irrigation banks.

Engineered with oil-filled bearings for superior performance and fully hydraulic adjustments for effortless operation, it delivers reliability and excellent value.

FEATURES & BENEFITS


- Heavy duty oil filled bearings
- Greasable bushes
- Extra heavy-duty frame, fully reinforced
- Full hydraulic adjustment
- Individual depth gauges
- High tensile pins throughout



COLLIER & MILLER



**SCAN FOR
MORE INFO**

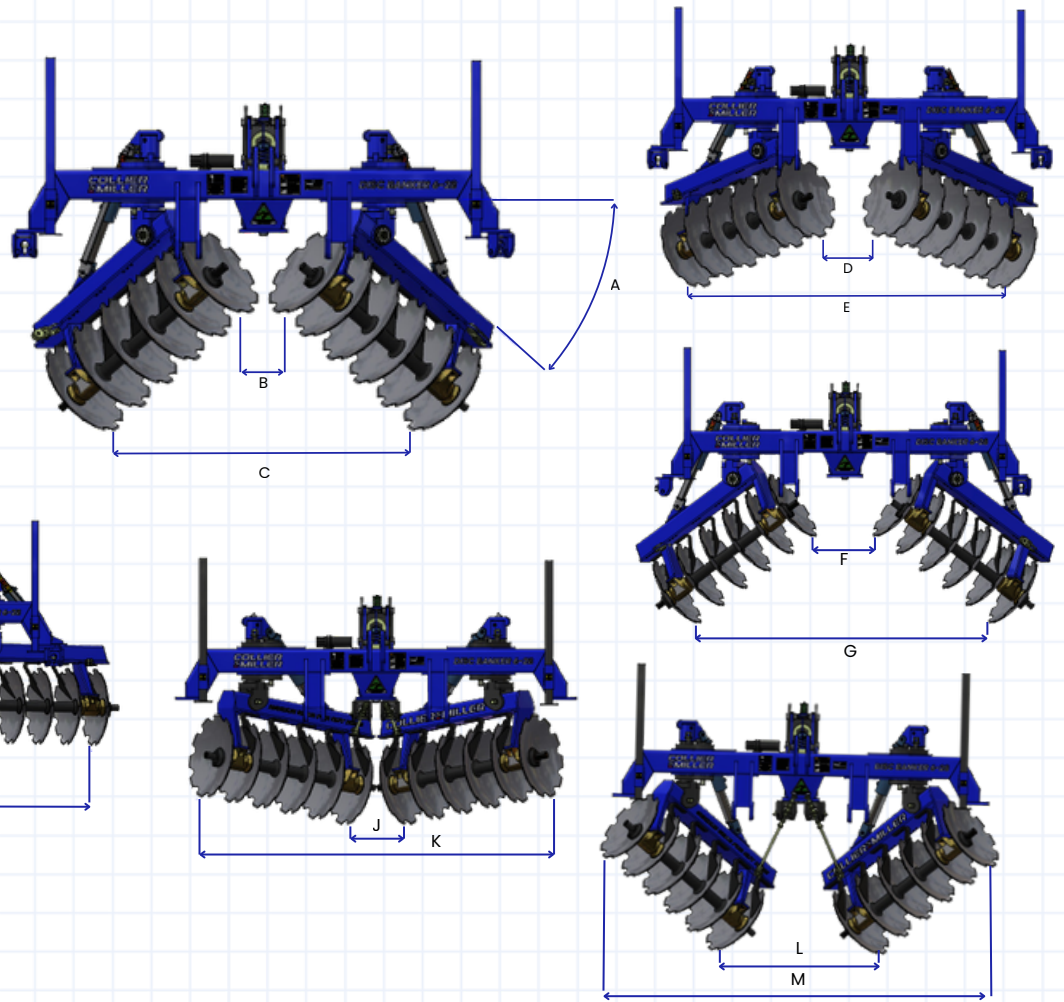

MODEL	CMD8	CMD87
DESCRIPTION	C&M 28x6 Disc Banker	C&M 28x7 Disc Banker
DISC DIAMETER AND THICKNESS	28" x 8mm	28" x 8mm
NUMBER OF DISC	12	14
OIL FILLED BEARINGS HOUSING	Yes	Yes
TAPER ROLLER BEARINGS AND DUROCONE SEALS	Yes	Yes
BANK BUILDING MODE MINIMUM/MAXIMUM	B=316mm C=2025mm D=490mm E=2575mm F=545mm G=2700mm H=1360mm I=3950mm	B=550mm C=2715mm D=900mm E=3500mm F=1100mm G=3430mm H=1870mm I=4200mm
MAXIMUM CUTTING TILT	A = 41deg	A = 41deg
DEPTH MARKER ON TILT CYLINDERS	Yes	Yes
CATEGORY LINKEAGE	Cat3 / Cat4	Cat3 / Cat4
REVERSABLE FOR CHANNEL CLEANING	Yes	Yes
CHANNEL BUILDING/CLEANING MODE MINIMUM/MAXIMUM	J=475mm K=3000mm L=1400mm M=3430mm	J=900mm K=3170mm L=1300mm M=3600mm
TURN BUCKLE WIDTH ADJUSTMENT	Yes	Yes
DISC SCRAPERS	Yes	Yes
MINIMUM TRACTOR HP	180HP	200HP
WEIGHT	1950kgs	2200kgs
HYDRAULIC WIDTH ADJUSTMENT	Available upon request	Available upon request
HYDRAULIC RIPPER	Available upon request	Available upon request

