

QUICK HITCH



Australian designed and manufactured, our Quick Hitch increases work efficiencies when interchanging implements day in day out.

Available in Standard and Heavy Duty versions, our Quick Hitch fits all Cat-3 / Cat-4 models and has a positive locking mechanism on all bottom pins. It is fully welded with high tensile pins and bolts used to add strength.

Speak to Collier & Miller regarding more information and pricing for our Quick Hitch.



FEATURES & BENEFITS

- Heavy Duty Construction
- Positive Locking Mechanism On Pins
- High Tensile Pins & Bolts
- Gold Passivated Pins & Bolts
- Fits All Cat-3 / Cat-4 Models
- Powder Coated Finish







Collier & Miller has over seventy years' experience in designing and manufacturing quality agricultural and industrial equipment. This product is Australian Made & Owned.



www.colliermiller.com.au

- AGRICULTURE
- CME Farm Machinery
- Linkage & Drawbar Products

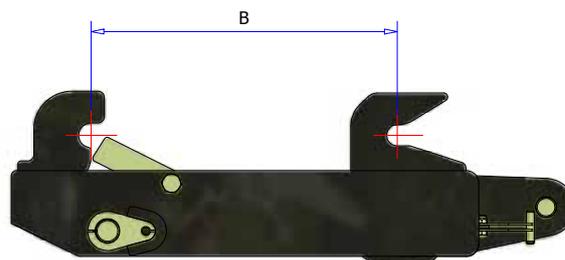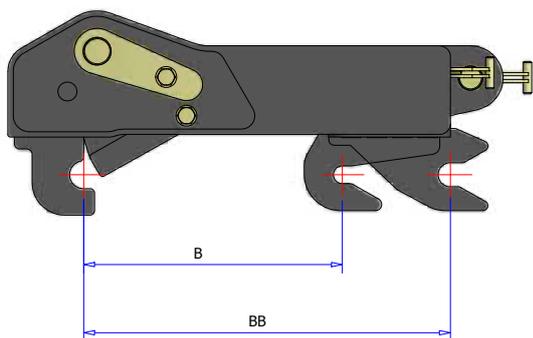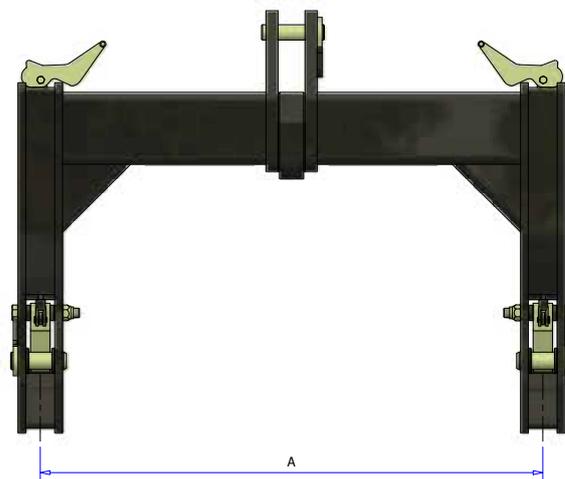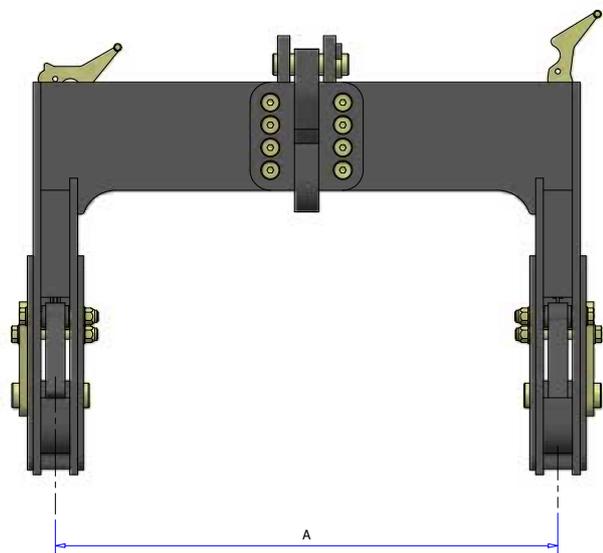

MODEL	QH	QH2	QHHD	QHHD34	QHSD	QHF	QHSD4	QHSD4W
DESCRIPTION	Quick hitch Cat 3 Tractor and Implement	Quick hitch Cat 2 Tractor and Cat 3 Implement	Quick hitch Heavy duty Cat 3 Tractor and Implement	Quick hitch Super duty Cat 3 Tractor and Cat 3-4 Implement	Quick hitch Super duty Cat 3 Tractor and Cat 3-4 Implement	Front quick hitch Cat 3 Narrow tractor Cat 3 wide Implement	Quick hitch Super duty Cat 4 Tractor and Cat 3-4 Implement	Quick Hitch Standard Cat 4 Super Duty (wide)
LOCK DEVICE	Spring loaded lug	Spring loaded lug	Spring loaded lug	Spring loaded lug	Spring loaded lug	Pin held lug	Spring loaded lug	Spring loaded lug
TRACTOR SIDE LINKAGE CATEGORY	Cat3	Cat2	Cat3	Cat4	Cat3	Cat3 Narrow	Cat4	Cat4
IMPLEMENT SIDE LINKAGE CATEGORY	Cat3	Cat3	Cat3	Cat3	Cat3/Cat4	Cat3	Cat3/Cat4	Cat4
BOTTOM LIFTING LUG CENTRES	A=1040mm	A=1040mm	A=1040mm	A=1040mm	A=1040mm	A=1040mm	A=1040mm	A=1256mm
BOTTOM LIFT LUG TO TOP LIFTING LUG CENTRES	B=478mm	B=478mm	B=478mm	B=478mm	B=478mm BB=678mm	B=478mm	B=478mm BB=678mm	B=678mm
BOTTOM PIN DIA	1 7/16"	1 7/16"	1 7/16"	1 7/16"	1 7/16 2"	1 7/16"	2"	2"
TOP PIN DIA	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4" 1 3/4"	1 1/4"	1 3/4"	1 3/4"
WEIGHT	105kgs	105kgs	145kgs	150kgs	280kgs	145kgs	280Kg	285Kg
POWDER COATED FINISH	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
SUITABLE HP TRACTOR	Up to 220HP	Up to 220HP	200-400HP	200-400HP	Over 400HP	220HP	Over 400HP	Over 400HP
CERTIFIED CARRYING CAPACITY	WLL 7000Kg	7000Kg	WLL 10,000Kg	WLL 10,000Kg	WLL 12,000Kg	WLL 7000Kg	WLL 12,000Kg	WLL 12,000Kg

